

Making your
home smarter⁺

Issue 2

ClickSmart⁺




click-smart.com

| | |
|-----------|--|
| 02 | Welcome to Click Smart+ |
| 03 | About Click Smart+ |
| 04 | How it works |
| 05 | Click Smart+ App |
| 07 | Getting set up |
| 10 | Click Smart+ Hub |
| 11 | Smart Decorative Wiring Accessories |
| 17 | Smart Antiviral & Antibacterial Certified Wiring Accessories |
| 20 | Smart Fused Connection Unit |
| 22 | Smart Socket |
| 24 | Smart Security |
| 26 | Smart Sensors |
| 31 | Smart Receivers |
| 35 | Getting Technical |
| 49 | Welcome to Fort Smart Security |

Can you imagine how your home could integrate itself into your daily life? Click Smart+, Scolmore's leading smart home brand, has been created to simplify and streamline your home life via the use of integrated technology.

Click Smart+ boasts an elite range of smart home products. Utilising Zigbee technology & WIFI to offer smart home solutions to new and existing wiring installations.

The possibilities of Click Smart+ are endless, but the set up – whether with WIFI or with Zigbee – is simple when using our Click Smart+ app.

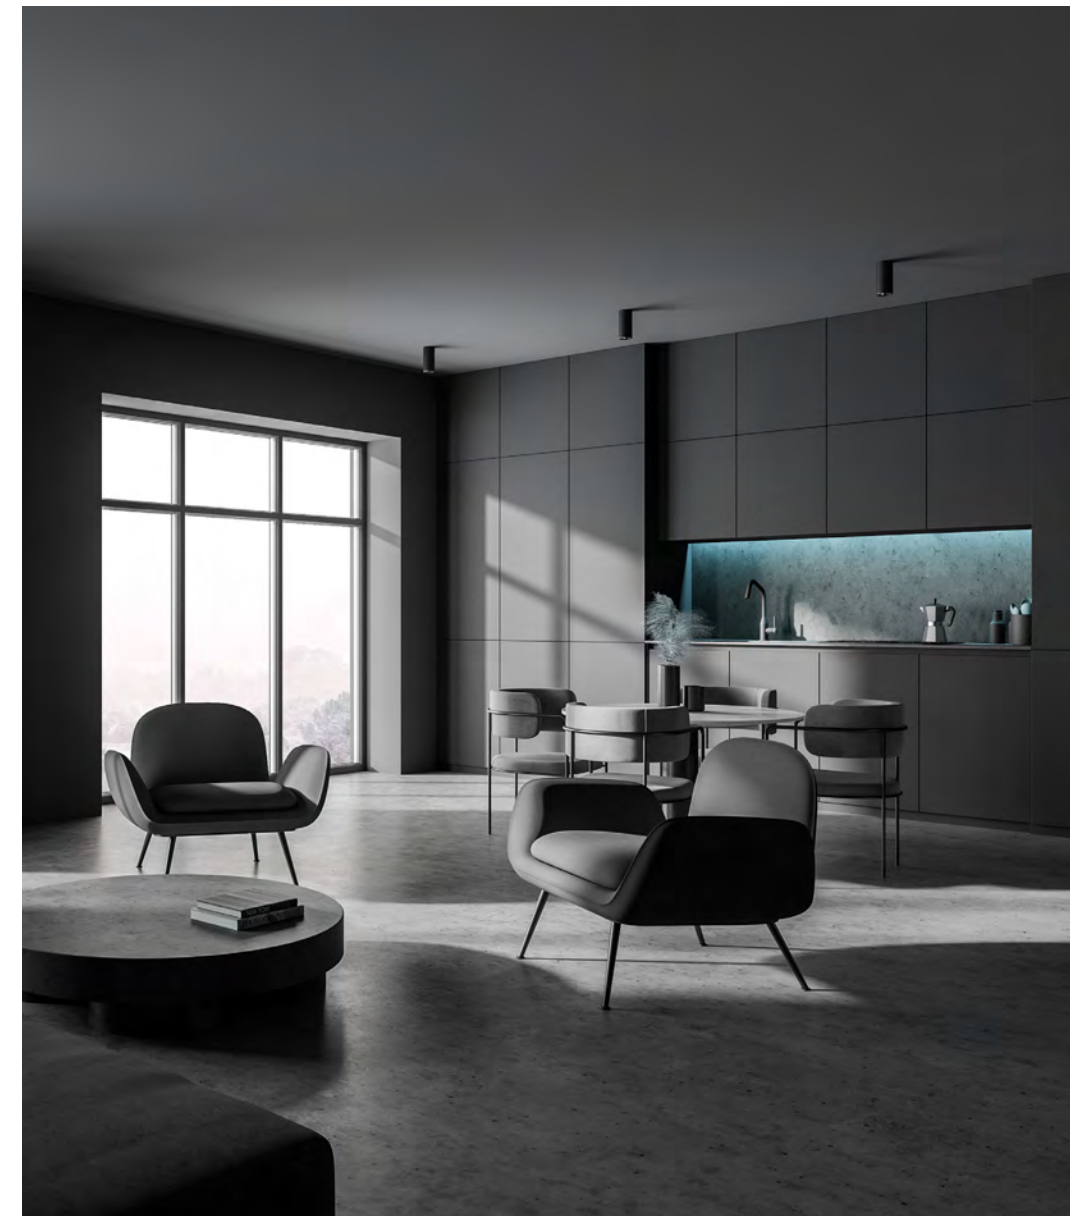

Get to know us



With Click Smart+ we create simple, beautiful smart solutions for a safer and more comfortable home. We have many products to meet all of your household needs.

Discover a whole range of smart home products. From smart sockets, cameras, sensors and receivers, all working together to make your home smarter.

The installation of Click Smart+ is simple & flexible, no additional cables or wall cutting is needed making it ideal for installation within existing or newly constructed buildings.

Each smart product comes with easy to follow installation guides which are also accessible through the new Click Smart+ app.

Make your home smarter, more comfortable and safer with any of our smart products. Why not get creative and take control of your home?

 **Look out for the Click Smart+ icon...**

Products with this icon are compatible across the whole Click Smart+ range.

Get smart with Zigbee

Zigbee devices can send and receive data between other Zigbee devices and the Hub. This means you can daisy chain smart devices and link them to a central hub, even when some of these devices are out of (direct) range of that hub.*

Zigbee increases flexibility for users and developers, delivering the confidence that products and services will work together through standardisation and testing.

A mesh network/daisy chain is when a network connection is spread out among wireless devices that can communicate with each other and share a network across a large area.

Zigbee's ability to support mesh networking means it can boost data transmission range and provide greater stability (even when a single connected device fails and doesn't work).



*Click Smart Plus works on a Tree-based Wireless Mesh Network. Battery operated devices cannot boost the data transmission range.

Get Creative

Automate your home with the Click Smart+ app.

'Tap to Run' Smart Scenes

Tap-to-run also known as 'Scenes' enables you to run multiple devices with a single tap of a button (within the Click Smart+ app). Think of this as one switch for a group of products.

For example you can create a Tap-to-run called 'Good Evening' which turns all your smart products on at once, instead of manually tapping each product within the app. Tap-to-runs can also control delay timings.

To control your Click Smart+ products through voice control you must have an Amazon Alexa speaker or a Google Home Speaker set up in your home and connected to the Click Smart+ app.



'Automation' Smart Scenes

Automations control your devices automatically when a condition is changed.

For example, you could programme a PIR detector with a switching receiver. When the PIR detector senses movement the automation (set up in the Click Smart+ app) can tell the switching receiver to turn 'ON' automatically.

Automations also allow you to set up timing Schedules for a group or singular smart products.

To control your Click Smart+ products through voice control you must have an Amazon Alexa speaker or a Google Home Speaker set up in your home and connected to the Click Smart+ app.




Stay Connected

Access your smart devices wherever you are and control them with Google or Alexa.

Control wherever you are

Peace of mind away from home. Easily check and change the status of your Click Smart+ devices wherever you are.

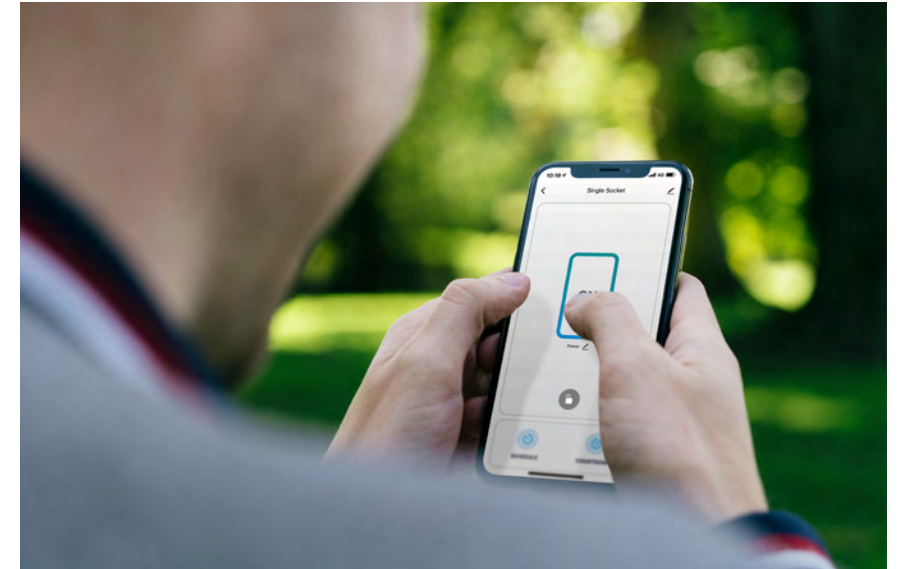

Hey Google!

Connect Click Smart+ to your existing Google Home devices. Just search for Click Smart+ in the Google Home app.




Alexa...

Have an Amazon smart speaker? Link your Click Smart+ devices in the Alexa app.




Start smart

Click Smart+ Hub – Set up Guide.

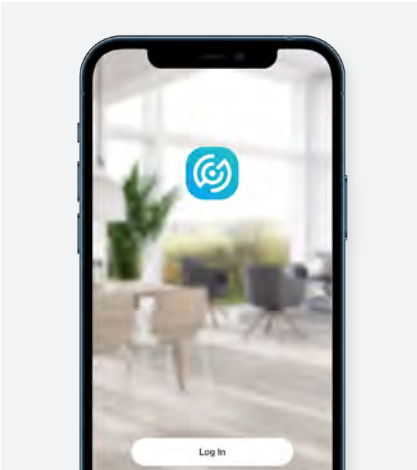


Click Smart+ App

Search and download the Click Smart+ app on ios or android devices. You will need the app to add, control and link all of your Click Smart+ devices.

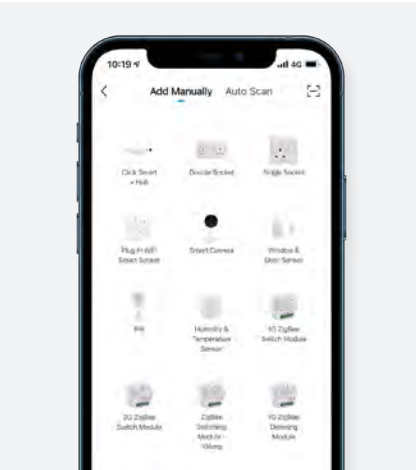

Adding the Hub

Once you are in the Click Smart+ app press the '+' icon and choose the Smart Hub, or use the auto scan feature to automatically detect your device.

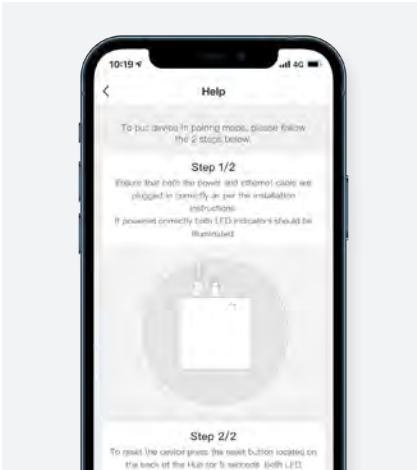

Complete Set Up

Once the app has found the Smart Hub simply follow the on screen instructions.

See your home, away from home

Click Smart+ Camera – Set up Guide.




Power Up!

After finding your perfect location, simply plug in your camera to a standard UK socket outlet.



Pairing Mode

You should now see a solid red LED light, after 10 seconds you should hear a chime & see a flashing LED light. You are now in pairing mode.

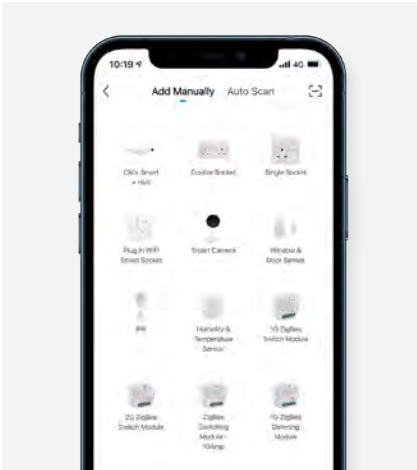


Complete Set Up

Open the Click Smart+ app and press the '+' icon and choose the Smart Camera. Then simply follow the on screen instructions.

Your home, your way

Click Smart+ Zigbee Products – Set up Guide.

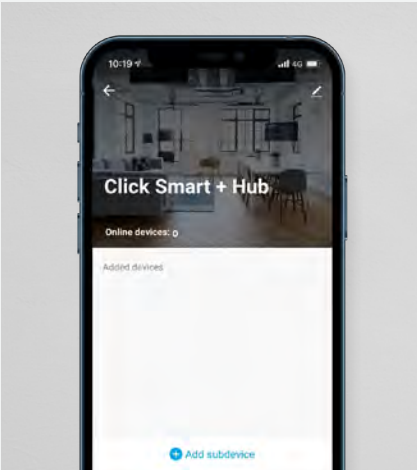


Click Smart+ Hub

Before setting up any Click Smart+ Zigbee supported products, please make sure you have set up your Smart Hub.



Installing

Once you have finished your installation, your Click Smart+ Zigbee supported product will automatically enter pairing mode.

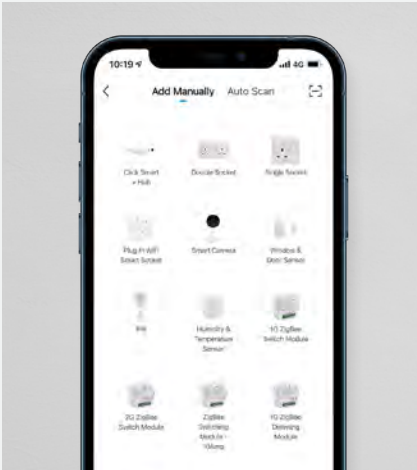

Complete Set Up

Open the Click Smart+ app press the '+' icon and choose the correct product, or use the auto scan feature to automatically detect your device.

A smarter switch

Switching & Dimming Receivers – Set up Guide.




Dimming Receiver

Install the receiver as per the provided instructions. With the light switch off, press the retractive switch down and hold for 10 seconds. The LED light on the receiver will flash. You are now in pairing mode.



Switching Receiver

Once wired up, flick the switch on & off 5 times until the light no longer turns on or off. You will also be able to see a flashing LED on the receiver. You are now in pairing mode.

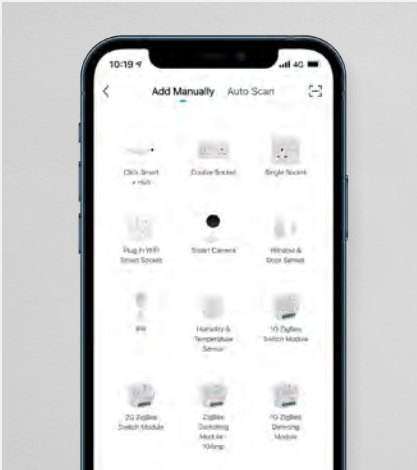

Complete Set Up

Open the Click Smart+ app press the '+' icon and choose the correct receiver, or use the auto scan feature to automatically detect your device.



CSP010 - Smart Hub wired to a home WIFI router.

Smart Hub
CSP010 - Smart Gateway Hub



- Supplied with plug in adaptor, USB cable and Ethernet cable
- Wireless Zigbee smart control

RATED VOLTAGE (DC)
1.8 - 3.3

MAX PAIRED DEVICES
256 paired devices max.*
(Depending on products connected)

CABLE TYPE
Micro USB

DIMENSIONS (MM)
90 (L) x 90 (W) x 23 (D)

FINISH
White

PRODUCT WARRANTY (YEARS)
1

*For more information on max paired devices please see CSP010 Data sheet





 Wireless Zigbee smart control

Control manually, via the app or voice control

The power to the socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)
3


LOAD RATING (A)
13

VOLTAGE (V~) & FREQUENCY (Hz)
240 & 50



MINIMUM BACK BOX DEPTH (MM)
35

DIMENSIONS (MM)
86 (W) x 86 (H) x 4 (D)

CONNECTIVITY
☐ WIFI Secure Connection
☒ Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)





 Wireless Zigbee smart control

Control manually, via the app or voice control

The power to the socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)
3


LOAD RATING (A)
13

VOLTAGE (V~) & FREQUENCY (Hz)
240 & 50



MINIMUM BACK BOX DEPTH (MM)
35

DIMENSIONS (MM)
146 (W) x 86 (H) x 4 (D)

CONNECTIVITY
☐ WIFI Secure Connection
☒ Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)





 Wireless Zigbee smart control
Control manually, via the app or voice control

The power to the socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)
3

LOAD RATING (A)
13

VOLTAGE (V~) & FREQUENCY (Hz)
240 & 50

MINIMUM BACK BOX DEPTH (MM)
25


DIMENSIONS (MM)
88 (W) x 88 (H) x 8 (D)

- CONNECTIVITY
- ☐ WIFI Secure Connection
 - ☒ Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)



 Wireless Zigbee smart control
Control manually, via the app or voice control

The power to the socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)
3

LOAD RATING (A)
13

VOLTAGE (V~) & FREQUENCY (Hz)
240 & 50

MINIMUM BACK BOX DEPTH (MM)
25

DIMENSIONS (MM)
146 (W) x 88 (H) x 8 (D)

- CONNECTIVITY
- ☐ WIFI Secure Connection
 - ☒ Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)





 Wireless Zigbee smart control
Control manually, via the app or voice control

The power to the socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)
3

LOAD RATING (A)
13

VOLTAGE (V~) & FREQUENCY (Hz)
240 & 50

MINIMUM BACK BOX DEPTH (MM)
25

DIMENSIONS (MM)
88 (W) x 88 (H) x 8 (D)

CONNECTIVITY

- ☐ WIFI Secure Connection
- ☒ Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)



 Wireless Zigbee smart control
Control manually, via the app or voice control

The power to the socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)
3

LOAD RATING (A)
13

VOLTAGE (V~) & FREQUENCY (Hz)
240 & 50

MINIMUM BACK BOX DEPTH (MM)
25

DIMENSIONS (MM)
146 (W) x 88 (H) x 8 (D)

CONNECTIVITY

- ☐ WIFI Secure Connection
- ☒ Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)





 Wireless Zigbee smart control
Control manually, via the app or voice control

The power to the socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)
3


LOAD RATING (A)
13

VOLTAGE (V~) & FREQUENCY (Hz)
240 & 50



MINIMUM BACK BOX DEPTH (MM)
25

DIMENSIONS (MM)
86 (W) x 86 (H) x 9.5 (D)

CONNECTIVITY
☐ WIFI Secure Connection
☒ Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)



 Wireless Zigbee smart control
Control manually, via the app or voice control

The power to the socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)
3


LOAD RATING (A)
13

VOLTAGE (V~) & FREQUENCY (Hz)
250 & 50



MINIMUM BACK BOX DEPTH (MM)
25

DIMENSIONS (MM)
146 (W) x 86 (H) x 9.5 (D)

CONNECTIVITY
☐ WIFI Secure Connection
☒ Zigbee Wireless Connection




*Smart Sockets require the Click Smart+ Hub (Sold separately)



Smart Fused Connection Units
CMA30651 - 13A Zigbee Smart Switched Fused Connection Unit



- Wireless Zigbee smart control
- Control manually, via the app or voice control
- The power to the FCU can be locked On or Off using the app, preventing manual switching
- Gasket supplied features cable outlet with restraint

| |
|--|
| LOAD RATING (A) |
| 13 |
| RATED VOLTAGE (V~) & FREQUENCY (Hz) |
| 240 & 50 |
| MINIMUM BACK BOX DEPTH (MM) |
| 25 (With Gasket) 35 (Without Gasket) |
| DIMENSIONS (MM) |
| 86 (W) x 86 (H) x 9 (D) |
| FINISH |
| Polar White |
| PRODUCT WARRANTY (YEARS) |
| 3 |

- WIFI Secure Connection
- Zigbee Wireless Connection




A simple way to
automate your
smart home.



Smart Socket

CSP060 - 13A Smart Plug-in WIFI Socket

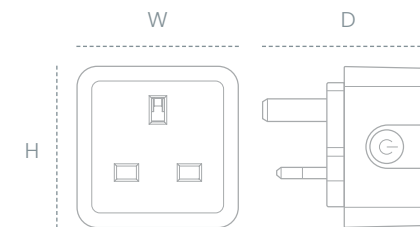

Utilise standard UK sockets installed

Control manually, via the app or
voice control

Pairs directly with your WIFI

LOAD RATING (A)

13

VOLTAGE (V~) & FREQUENCY (Hz)

230 & 50/60

DIMENSIONS (MM)

57 (W) x 57 (H) x 65 (D)

FINISH


White

PRODUCT WARRANTY (YEARS)


2

CONNECTIVITY

- ☒ WIFI Secure Connection
- ☐ Zigbee Wireless Connection

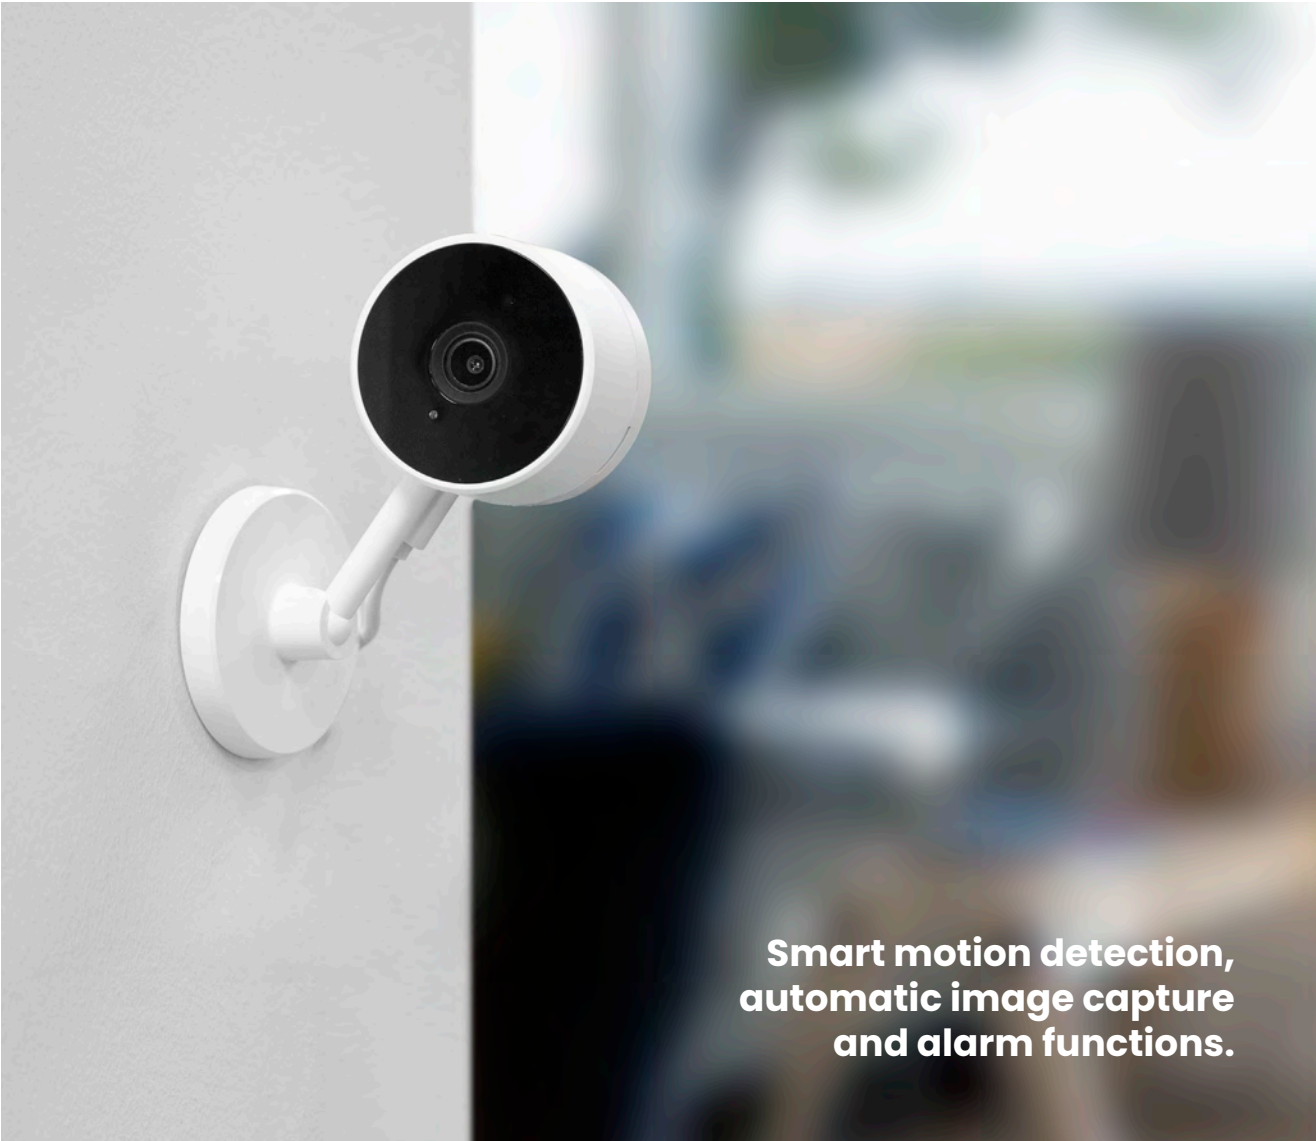

Smart Camera
CSP020 – Smart Camera

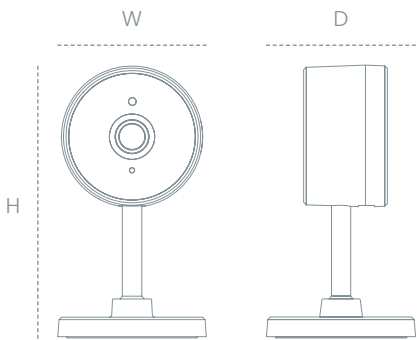

- 1080p resolution
- Motion detection available
- 7 metre night vision
- Microphone & speaker
(2 way push-to-talk)
- Indoor use only
- Plug-in adaptor supplied

RATED VOLTAGE (DC)

5

STORAGE

128GB Max.
(Micro SD Card - Not Supplied)

FIELD ANGLE (°)

114 (Diagonal)

DIMENSIONS (MM)

34 (W) x 58 (D) x 116 (H)

FINISH

White

PRODUCT WARRANTY (YEARS)

1

CONNECTIVITY

- WIFI Secure Connection
- Zigbee Wireless Connection




The all-seeing eye that guards your home.



CSP032 - Smart PIR Sensor shown ceiling mounted.

Smart Sensors
CSP032 - Smart PIR

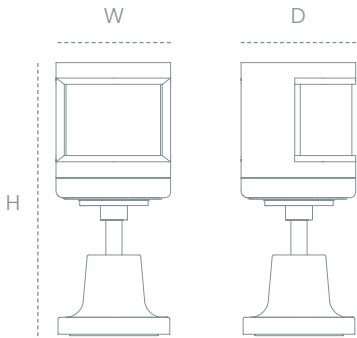

- Wireless Zigbee smart control
- Sticky pads supplied and fitted
- CR 2450 battery supplied

SENSOR
Infrared

DETECTION RANGE (M)
7 metre detection distance

DETECTION ANGLE (°)
170


BATTERY LIFETIME (APPROX)
1 Year (Dependent On Use)

DIMENSIONS (MM)
33 (W) x 33 (D) x 39.5 (H)

FINISH
White

PRODUCT WARRANTY (YEARS)
1

- CONNECTIVITY**
- ☐ WIFI Secure Connection
 - ☒ Zigbee Wireless Connection




*Smart Sensors require the Click Smart+ Hub (Sold separately)



Getting the right temperature the smart way.

CSP033 – Smart Temperature & Humidity sensor wall mounted.

Smart Sensors
CSP033 – Smart Temperature & Humidity Sensor

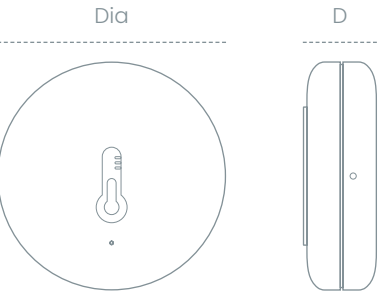

 Wireless Zigbee smart control

Detection accuracy ±3%

CR 2032 battery supplied

TEMPERATURE DETECTION RANGE (°C)
Temperature range -10°C - +50°C

HUMIDITY DETECTION RANGE (%)
Humidity range 0% to 100%


BATTERY LIFETIME (APPROX)
1 Year (Dependent On Use)

DIMENSIONS (MM)
37 (Dia.) x 11.6 (D)

FINISH
White

PRODUCT WARRANTY (YEARS)
1

- CONNECTIVITY**
- ☐ WIFI Secure Connection
 - ☒ Zigbee Wireless Connection




*Smart Sensors require the Click Smart+ Hub (Sold separately)



Real time monitoring for door and window status.

CSP031 - Smart Sensors internally fitted on garden doors.

Smart Sensors
CSP031 – Smart Window & Door Sensor

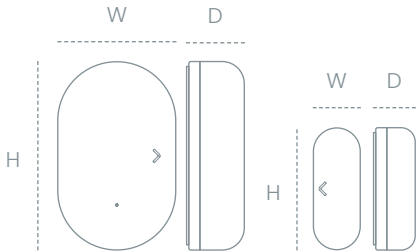

- Wireless Zigbee smart control
- Activate or deactivate lighting or devices when triggered using the app
- CR 2032 battery supplied
- ACTIVATION DISTANCE (MM)**
Detection distance 10-20mm between transmitter and magnet
- BATTERY LIFETIME (APPROX)**
1 Year (Dependent On Use)
- TRANSMITTER DIMENSIONS (MM)**
40 (L) x 25 (W) x 14.5 (D)
- MAGNET DIMENSIONS (MM)**
26 (L) x 10 (W) x 9 (D)
- FINISH**
White
- PRODUCT WARRANTY (YEARS)**
1
- CONNECTIVITY**

☐

WIFI Secure Connection

☒


Zigbee Wireless Connection





*Smart Sensors require the Click Smart+ Hub (Sold separately)

Smart Receivers

Control your lights and appliances from wherever you are.

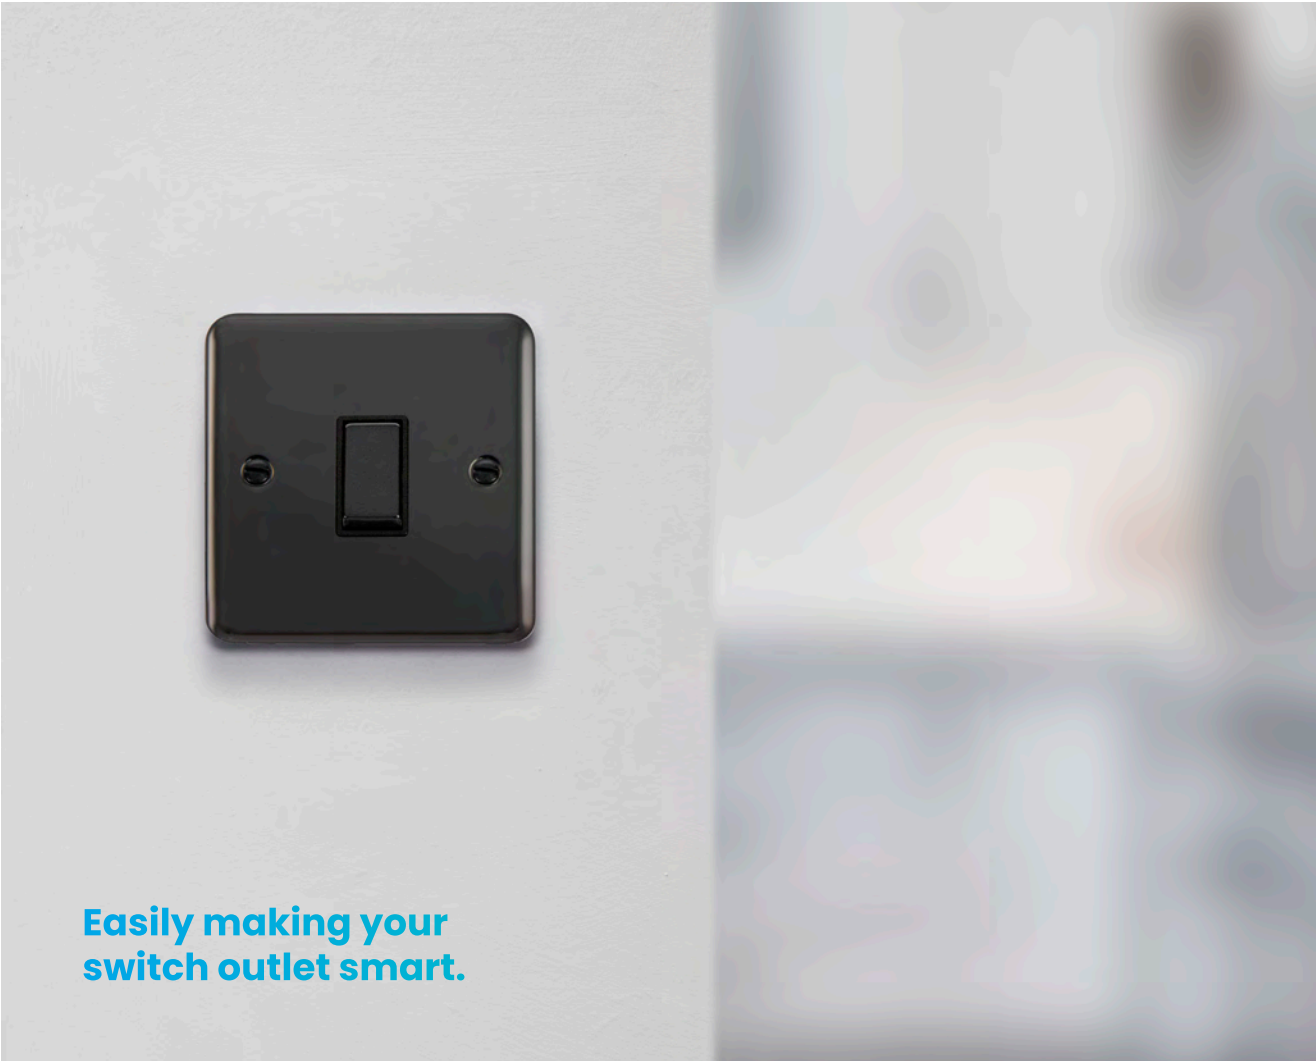


Easily making your switch outlet smart.

| | | |
|--|---|---|
| <div><div></div><div>Wireless Zigbee smart control</div></div> <div>No neutral connection required (Except CSP043)</div> <div>Up to 100 metre detection range (open air)</div> | <div><div>FINISH</div><div>White</div></div> <div><div>MINIMUM BACK BOX DEPTH (MM)</div><div>35 (47 Flat Plate)</div></div> <div><div>DIMENSIONS (MM)</div><div>46 (W) x 46 (H) x 18 (D)</div></div> <div><div>PRODUCT WARRANTY (YEARS)</div><div>2</div></div> | <div><div>CONNECTIVITY</div><div><div><input type="radio"/> WIFI Secure Connection</div><div><input checked="" type="radio"/> Zigbee Wireless Connection</div></div></div> <div><div></div><div>*Smart Receivers require the Click Smart+ Hub (Sold separately)</div></div> |
|--|---|---|


Switching Receivers

(Utilises standard on/off switches)

| | | |
|--|---|--|
| <div><div>CSP041</div><div>100W 1 Gang Smart Switching Receiver</div></div> <div></div> <div><div>LOAD RATING (W)</div><div>100 LED</div></div> | <div><div>CSP042</div><div>2 x 100W 2 Gang Smart Switching Receiver</div></div> <div></div> <div><div>LOAD RATING (W)</div><div>100 (x2) LED</div></div> | <div><div>CSP043</div><div>10A 1 Gang Smart Switching Receiver</div></div> <div></div> <div><div>LOAD RATING (W)</div><div>250 (2300) LED (Resistive)</div></div> |
|--|---|--|

Dimming Receivers

(Utilises retractive switches)

| | |
|--|---|
| <div><div>CSP051</div><div>150W 1 Gang Smart Dimming Receiver</div></div> <div></div> <div><div>LOAD RATING (W)</div><div>150 LED</div></div> | <div><div>CSP052</div><div>2 x 100W 2 Gang Smart Dimming Receiver</div></div> <div></div> <div><div>LOAD RATING (W)</div><div>100 (x2) LED</div></div> |
|--|---|



**Communicate and
connect with your
home – anywhere.**



Definity Range

(All Definity inserts supplied complete with cover plates)



Matt Black



Single Plate SFBK30035*
Double Plate SFBK30036*



Stainless Steel



Single Plate SFSS30035*
Double Plate SFSS30036*



Brushed Stainless Steel



Single Plate SFBS30035*
Double Plate SFBS30036*



Polished Chrome



Single Plate SFCH30035*
Double Plate SFCH30036*



Metal White



Single Plate SFMW30035*
Double Plate SFMW30036*



Polar White



Single Plate SFPW30035*
Double Plate SFPW30036*



*When choosing your desired product, just add your chosen insert colour (E.G. 'GY') to the end of the code.

Getting Technical

| Product Information | |
|--|------------------|
| Load Rating (A) | 13 |
| Voltage (V~) & Frequency (Hz) | 240 & 50 |
| Standby Current (mA) | 1 |
| Protocol | Zigbee |
| Open Air Wireless Range (M) | <160 |
| Signal Frequency | 2.4GHz |
| Terminal Size (mm) | 5.7 x 4.8 |
| Terminal Capacity - Solid (mm²) | 3 x 2.5 or 2 x 4 |
| Single Pole Switched | Yes |
| Operational Temperature (°C) | -5 to +40 |
| Ingress Protection | IP20 |
| Indicator Colour | White & Orange |
| Product Standards | |
| BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1 | |

| Product Information | |
|--|------------------|
| Load Rating (A) | 13 |
| Voltage (V~) & Frequency (Hz) | 240 & 50 |
| Standby Current (mA) | 1 |
| Protocol | Zigbee |
| Open Air Wireless Range (M) | <160 |
| Signal Frequency | 2.4GHz |
| Terminal Size (mm) | 5.7 x 4.8 |
| Terminal Capacity - Solid (mm²) | 3 x 2.5 or 2 x 4 |
| Single Pole Switched | Yes |
| Operational Temperature (°C) | -5 to +40 |
| Ingress Protection | IP20 |
| Indicator Colour | White & Orange |
| Product Standards | |
| BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1 | |

Click Smart+ app for ios & android



DEFINITY
13A 1 Gang Zigbee Smart
Switched Socket Outlet &
Cover Plate

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on and off manually, with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



DEFINITY
13A 2 Gang Zigbee Smart
Switched Socket Outlet &
Cover Plate

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on or off manually with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



Deco Plus Range

Satin Chrome



Single Plate DPSC30535*
Double Plate DPSC30536*



Stainless Steel



Single Plate DPSS30535*
Double Plate DPSS30536*



Polished Chrome



Single Plate DPCH30535*
Double Plate DPCH30536*



Antique Brass



Single Plate DPAB30535*
Double Plate DPAB30536*



*When choosing your desired product, just add your chosen insert colour (E.G. ‘GY’) to the end of the code.



Getting Technical

| Product Information | |
|--|------------------|
| Load Rating (A) | 13 |
| Voltage (V~) & Frequency (Hz) | 240 & 50 |
| Standby Current (mA) | 1 |
| Protocol | Zigbee |
| Open Air Wireless Range (M) | <160 |
| Signal Frequency | 2.4GHz |
| Terminal Size (mm) | 5.7 x 4.8 |
| Terminal Capacity - Solid (mm²) | 3 x 2.5 or 2 x 4 |
| Single Pole Switched | Yes |
| Operational Temperature (°C) | -5 to +40 |
| Ingress Protection | IP20 |
| Indicator Colour | White & Orange |
| Product Standards | |
| BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1 | |

| Product Information | |
|--|------------------|
| Load Rating (A) | 13 |
| Voltage (V~) & Frequency (Hz) | 240 & 50 |
| Standby Current (mA) | 1 |
| Protocol | Zigbee |
| Open Air Wireless Range (M) | <160 |
| Signal Frequency | 2.4GHz |
| Terminal Size (mm) | 5.7 x 4.8 |
| Terminal Capacity - Solid (mm²) | 3 x 2.5 or 2 x 4 |
| Single Pole Switched | Yes |
| Operational Temperature (°C) | -5 to +40 |
| Ingress Protection | IP20 |
| Indicator Colour | White & Orange |
| Product Standards | |
| BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1 | |

Click Smart+ app for ios & android



DECO PLUS
13A Ingot 1 Gang Zigbee
Smart Switched Socket Outlet

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on and off manually, with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



DECO PLUS
13A Ingot 2 Gang Zigbee
Smart Switched Socket Outlet

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on or off manually with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



Deco Range



Satin Chrome



Single Plate
VPSC30535*

Double Plate
VPSC30536*



Stainless Steel



Single Plate
VPSS30535*

Double Plate
VPSS30536*



Polished Chrome



Single Plate
VPCH30535*

Double Plate
VPCH30536*



Antique Brass



Single Plate
VPAB30535*

Double Plate
VPAB30536*



*When choosing your desired product, just add your chosen insert colour (E.G. ‘GY’) to the end of the code.

Getting Technical

| Product Information | |
|--|------------------|
| Load Rating (A) | 13 |
| Voltage (V~) & Frequency (Hz) | 240 & 50 |
| Standby Current (mA) | 1 |
| Protocol | Zigbee |
| Open Air Wireless Range (M) | <160 |
| Signal Frequency | 2.4GHz |
| Terminal Size (mm) | 5.7 x 4.8 |
| Terminal Capacity – Solid (mm²) | 3 x 2.5 or 2 x 4 |
| Single Pole Switched | Yes |
| Operational Temperature (°C) | -5 to +40 |
| Ingress Protection | IP20 |
| Indicator Colour | White & Orange |
| Product Standards | |
| BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1 | |

| Product Information | |
|--|------------------|
| Load Rating (A) | 13 |
| Voltage (V~) & Frequency (Hz) | 240 & 50 |
| Standby Current (mA) | 1 |
| Protocol | Zigbee |
| Open Air Wireless Range (M) | <160 |
| Signal Frequency | 2.4GHz |
| Terminal Size (mm) | 5.7 x 4.8 |
| Terminal Capacity – Solid (mm²) | 3 x 2.5 or 2 x 4 |
| Single Pole Switched | Yes |
| Operational Temperature (°C) | -5 to +40 |
| Ingress Protection | IP20 |
| Indicator Colour | White & Orange |
| Product Standards | |
| BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1 | |

Click Smart+ app
for ios & android



13A Ingot 1 Gang Zigbee Smart Switched Socket Outlet

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on and off manually, with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



13A Ingot 2 Gang Zigbee Smart Switched Socket Outlet

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on or off manually with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



Getting Technical



CMA30035
13A 1 Gang Zigbee Smart Switched Socket Outlet

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on and off manually, with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



| Product Information | |
|--|------------------|
| Load Rating (A) | 13 |
| Voltage (V~) & Frequency (Hz) | 240 & 50 |
| Standby Current (mA) | 4 |
| Protocol | Zigbee |
| Open Air Wireless Range (M) | <160 |
| Signal Frequency | 2.4GHz |
| Terminal Size (mm) | 5.7 x 4.8 |
| Terminal Capacity - Solid (mm²) | 3 x 2.5 or 2 x 4 |
| Single Pole Switched | Yes |
| Operational Temperature (°C) | -5 to +40 |
| Ingress Protection | IP20 |
| Indicator Colour | White & Orange |
| Product Standards | |
| BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1 | |



CMA30036
13A 2 Gang Zigbee Smart Switched Socket Outlet

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on or off manually with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



| Product Information | |
|--|------------------|
| Load Rating (A) | 13 |
| Voltage (V~) & Frequency (Hz) | 250 & 50 |
| Standby Current (mA) | 4 |
| Protocol | Zigbee |
| Open Air Wireless Range (M) | <160 |
| Signal Frequency | 2.4GHz |
| Terminal Size (mm) | 5.7 x 4.8 |
| Terminal Capacity - Solid (mm²) | 3 x 2.5 or 2 x 4 |
| Single Pole Switched | Yes |
| Operational Temperature (°C) | -5 to +40 |
| Ingress Protection | IP20 |
| Indicator Colour | White & Orange |
| Product Standards | |
| BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1 | |

Click Smart+ app
for ios & android



CSP010
Smart Gateway Hub

The Smart Hub is the control centre of all Zigbee Protocol devices within a smart home.

Even if the homes WIFI is unstable or interrupted smart devices will still be able to function normally.



| Product Information | |
|--|----------------------------|
| Rated Voltage (DC) | 1.8 - 3.3 |
| Operational Temperature (°C) | -10 to +55 |
| Working Humidity | 10%-90%RH (Non-condensing) |
| Protocol | Zigbee |
| Wireless Technology | WIFI 801.11 b/g/n |
| Signal Frequency | 400MHz |
| Ingress Protection | IP20 |
| Indicator Colour | Green |
| Product Dimensions (mm) | 90 (L) x 90 (W) x 23 (D) |
| Product Warranty (Years) | 1 |
| Product Standards | |
| BS EN 60950-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3 , BS EN 62311 | |



CMA30651
13A Zigbee Smart Switched Fused Connection Unit

With the smart FCU you can control home appliances like kitchen appliances, towel rails, heaters etc.

Simply turn them on or off manually with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.

Even if the homes WIFI is unstable or interrupted smart devices will still be able to function normally.



| Product Information | |
|--|------------------|
| Load Rating (A) | 13 |
| Voltage (V~) & Frequency (Hz) | 240 & 50 |
| Standby Current (mA) | 1 |
| Protocol | Zigbee |
| Open Air Wireless Range (M) | <160 |
| Signal Frequency | 2.4GHz |
| Fuse Fitted Rating & Type | 13A (BS 1362) |
| Terminal Capacity - Solid (mm²) | 3 x 2.5 or 2 x 4 |
| Single Pole Switched | Yes |
| Operational Temperature (°C) | -5 to +40 |
| Ingress Protection | IP20 |
| Indicator Colour | White & Orange |
| Product Standards | |
| BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1 | |

Getting Technical



CSP060
13A Smart Plug-in
WIFI Socket

With the smart plug, you can plug in home appliances like toasters, electric kettles, lamps etc.

Simply turn them on or off manually with your voice, mobile phone or an automation. It can be controlled through existing WIFI network via the Click Smart+ app.



| Product Information | |
|--|--------------------------|
| Load Rating (A) | 13 |
| Voltage (V~) & Frequency (Hz) | 230 & 50/60 |
| Standby Current (mA) | <100 |
| Protocol | WIFI |
| Signal Frequency | 2.4GHz |
| Operational Temperature (°C) | -20 to +40 |
| Ingress Protection | IP20 |
| Indicator Colour | Blue |
| Product Dimensions (mm) | 57 (W) x 57 (H) x 65 (D) |
| Product Warranty (Years) | 2 |
| Product Standards | |
| BS1363-3, BS EN 55035, BS EN 61000-3-2 & BS EN 61000-3-3 , BS EN 301489-1 & BS EN 301489-17, BS EN 62311 | |



CSP020
Smart Camera

Plug and play smart camera. Simply place or mount using the self adhesive pad included. Install micro SD card and record playback.

When an object or person moves in the detection field the app sends an alarm and captures images in real time.

Additional settings can be added via the app to activate smart receivers controlling lighting and other connected devices.



| Product Information | |
|--|--------------------|
| Load Rating (A) | 1 |
| Rated Voltage (DC) | 5 |
| Resolution | 1080p |
| Field Angle (°) | 114 (Diagonal) |
| Aperture | F2.0 (Fixed) |
| Lens Zoom (mm) | 2.8 |
| Protocol | WIFI |
| Signal Frequency | 2.412 to 2.4835GHz |
| Working Humidity | ≤95% |
| Operational Temperature (°C) | -10 to +45 |
| Ingress Protection | IP20 |
| Indicator Colour | Red / Green |
| Product Standards | |
| BS EN 60950-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3 , BS EN 62311 | |

Click Smart+ app
for ios & android



CSP032
Smart PIR

The PIR senses motion as you get up in the night and automatically turns on a lamp when automated with the Smart Sockets or Smart Switching Receiver on the Click Smart+ app.



| Product Information | |
|--|---------------------------|
| Rated Voltage (DC) | 3 |
| Battery Type | CR 2450 (Supplied) |
| Battery Lifetime (Approx) | 1 Year (Dependent On Use) |
| Sensor | Infrared |
| Detection Range (M) | 7 |
| Detection Angle (°) | 170 |
| Protocol | Zigbee |
| Signal Frequency | 2.4GHz |
| Working Humidity | 10%-90%RH |
| Operational Temperature (°C) | -10 to +50 |
| Ingress Protection | IP20 |
| Indicator Colour | Blue |
| Product Standards | |
| BS EN 60950-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3 , BS EN 62311 | |

| Product Information | |
|--|----------------------------|
| Rated Voltage (DC) | 3 |
| Battery Type | CR 2032 (Supplied) |
| Battery Lifetime (Approx) | 1 Year (Dependent On Use) |
| Protocol | Zigbee |
| Signal Frequency | 2.4GHz |
| Temperature Accuracy (%) | ±3 |
| Temperature Detection Range (°C) | -10 to +50 |
| Humidity Detection Range (%) | 0 to 100 |
| Working Humidity | 0%-100%RH (Non-condensing) |
| Operational Temperature (°C) | -10 to +50 |
| Ingress Protection | IP20 |
| Indicator Colour | Blue |
| Product Standards | |
| BS EN 60950-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3 , BS EN 62311 | |



CSP033
Smart Temperature &
Humidity Sensor

Whenever the sensor identifies that your homes temperature or humidity is outside your defined zone of comfort, the heater, fan or other relevant devices that are plugged into your smart socket will automatically activate.

This ensures that your homes environment condition remains stable and comfortable.



Getting Technical



CSP031
Smart Window & Door Sensor

Install the Smart Window & Door Sensor to a main or back door.

Install a switching/dimming receiver to a light or switch and then set up automations on the Click Smart+ app.

Your lights will turn on automatically to greet you when you are back home or going in the garden at night.



Smart Switching Receivers

Click Smart+ receivers control your lights and appliances from wherever you are.

All the receivers come supplied with a removable bracket. The bracket can be used to mount the receivers in a back box if installed directly behind the switch or at the light source.

The bracket also features a DIN rail clip, allowing the installer to directly install in the consumer unit.

Utilises standard on/off switches.



* The switching receivers do not require a neutral supply (except CSP043). The Click Smart+ receivers require a permanent live supply which will then enable switching of the respective live outputs to the devices.

| Product Information | |
|--|-----------------------------------|
| Rated Voltage (DC) | 3 |
| Battery Type | CR 2032 (Supplied) |
| Battery Lifetime (Approx) | 1 Year (Dependent On Use) |
| Protocol | Zigbee |
| Signal Frequency | 2.4GHz |
| Activation Distance (mm) | 10 – 20 (Between Sensor & Magnet) |
| Working Humidity | 0%-95%RH (Non-condensing) |
| Operational Temperature (°C) | -10 to +50 |
| Ingress Protection | IP20 |
| Indicator Colour | Blue |
| Product Standards | |
| BS EN 60950-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3 , BS EN 62311 | |

| Product Information | CSP041 | CSP042 | CSP043 |
|--|--------------------|----------|------------|
| Load Rating (W) | 100 | 100 (x2) | 250 (2300) |
| Indicator Colour | Blue | Blue | Green |
| Voltage (V~) & Frequency (Hz) | 220-240 & 50/60 | | |
| Working Current (mA) | 10 | | |
| Standby Current (mA) | 1 | | |
| Protocol | Zigbee | | |
| Signal Frequency | 2.400 to 2.484GHz | | |
| Open Air Wireless Range (M) | <100 | | |
| Terminal Size (mm) | 3 x 2 | | |
| Terminal Torque (Nm) | 0.2 | | |
| Terminal Capacity – Solid (mm²) | 3 x 1.5 | | |
| Minimum Back Box Depth (mm) | 35 (47 Flat Plate) | | |
| Working Humidity | 10%-90%RH | | |
| Operational Temperature (°C) | -10 to +40 | | |
| Ingress Protection | IP20 | | |
| Product Standards | | | |
| BS EN 60669-2-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3 , BS EN 62311 | | | |

Click Smart+ app
for ios & android



Smart Dimming Receiver

Packed with all the same great features as the Switching Receivers but with added dimming capabilities.

Utilises retractive switches.



| Product Information | CSP051 | CSP052 |
|--|--------------------|----------|
| Load Rating (W) | 150 | 100 (x2) |
| Indicator Colour | Blue | |
| Voltage (V~) & Frequency (Hz) | 220-240 & 50/60 | |
| Working Current (mA) | 20 | |
| Standby Current (mA) | 3 | |
| Protocol | Zigbee | |
| Signal Frequency | 2.400 to 2.4835GHz | |
| Open Air Wireless Range (M) | <100 | |
| Terminal Size (mm) | 3 x 2 | |
| Terminal Torque (Nm) | 0.2 | |
| Terminal Capacity - Solid (mm²) | 3 x 1.5 | |
| Minimum Back Box Depth (mm) | 35 (47 Flat Plate) | |
| Working Humidity | 10%-90%RH | |
| Operational Temperature (°C) | -10 to +40 | |
| Ingress Protection | IP20 | |
| Product Standards | | |
| BS EN 60669-2-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3 , BS EN 62311 | | |

*The dimming receivers do not require a neutral supply. The Click Smart+ receivers require a permanent live supply which will then enable switching and dimming of the respective live outputs to the lighting.

Fort

**Smart Security,
Building a safer home.**



Welcome to Fort

Smart Security Products.

fort



At ESP® we create simple, smart solutions for a safer and more comfortable home.

We have many products to meet all your household needs. Discover a whole range of smart home products. From smart alarm kits, smart cameras, smart sensors and smart door bells, all working together to make your home smarter and safer.

The installation of our Fort range is simple & flexible, making it ideal for installation within existing or newly constructed buildings.


Each smart product comes with easy to follow installation guides which are also accessible through the new Click Smart+ app.

Make your home smarter, more comfortable and safer with any of our smart products.


Why not get creative and take control of your home?




Fort Smart Security



Smart Alarm Kits




Smart Security Alarms



Smart Doorbells



Smart Security Cameras



Smart Security Lights

United Kingdom



Scolmore House
Mariner, Lichfield Road Industrial Estate
Tamworth, Staffordshire, B79 7UL

+44 (0) 1827 63454
sales@scolmore.com
www.click-smart.com



Southern Ireland

CLiCK® Litehouse

18 Corrig Road,
Sandyford Industrial Estate,
Dublin, D18 WV79, Ireland

T: +353 (1) 2811 122
F: +353 (1) 2811 224
E: sales@clicklitehouse.ie
www.clicklitehouse.ie



Scolmore® Dubai



Lake Central Tower,
Office 1803, Business Bay,
Dubai, UAE

UAE Office: +971 4589 6552
F: +971 52 451 1164
E: sales@scolmoredubai.com
www.scolmoredubai.com

