


Product Code: CMA30036

Description: 13A 2 Gang Zigbee Smart Switched Socket Outlet

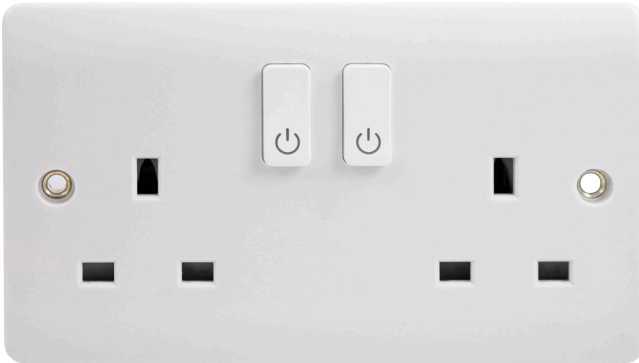

General Information

Plate Dimensions	146mm (W) x 86mm (H) x 9.5mm (D)	
Materials	Front Plate: Urea Terminals: Brass Internal Busbars: Formed Pressed Brass	Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Electronics: PCB & Electronic Components
Maximum Voltage	240V~ 50Hz	
Load Rating	13A	
Plate Fixing Centres	120.6mm	
Terminal Size	5.7mm x 4.8mm	
Terminal Torque	1.2Nm	
Terminal Capacity	3 x 2.5mm ² or 2 x 4mm ²	
Shuttered	3 Pin Safety Shutter	
Single Pole	Yes	
Twin Earth Terminals	Yes	
Protocol	Zigbee	
Standby Current	4mA	
Ingress Protection	IP20	
Back Box Depth	25mm Minimum	
Termination Type	Screw	
Operational Temperature	-5°C to +40°C	
Warranty	3 Years	
Standards	BS 1363-2: 2016 + A1:2018 BS EN 61000-6-1:2016 BS EN 61000-6-3:2006/+A1:2010 BS EN 60669-2-1:2002 + A1:2008 in conjunction with BS EN 60669-1:1998 + A1:1999 + A2:2006	

Additional Information

3 pin safety shutter. The shutter will only open once all three plug pins are inserted.
Zigbee signal mesh
Each outlet enables manual control (unless locked), wireless control and automated control
Voice control via ClickSmart+ Hub using Alexa and/or Google Home

Programming Information

With hub and app setup and socket wired and powered, press one of the switches for five to ten seconds, the orange LED indicator starts flashing. Can be paired with hub via app.

